

No. 727,331.

PATENTED MAY 5, 1903.

R. A. FESSENDEN.
RECEIVER FOR ELECTROMAGNETIC WAVES.

APPLICATION FILED APR. 9, 1903.

2 SHEETS—SHEET 1.

NO MODEL.

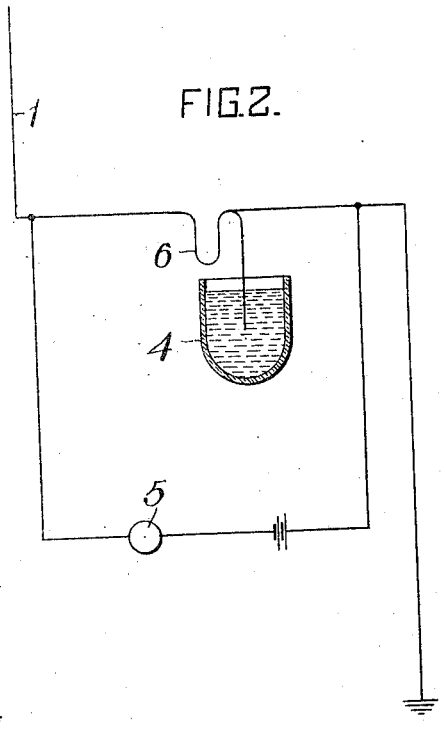
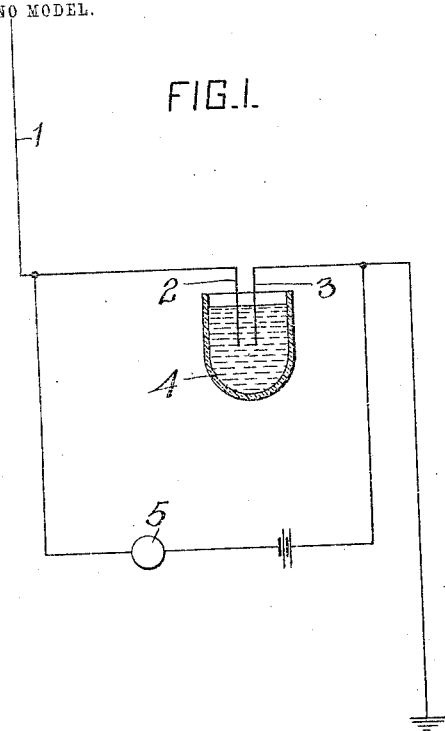


FIG. 3.


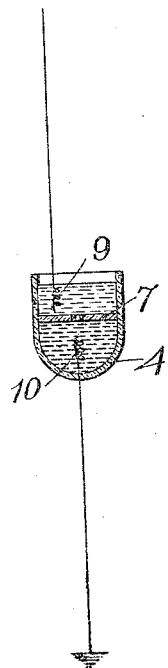


FIG. 4.

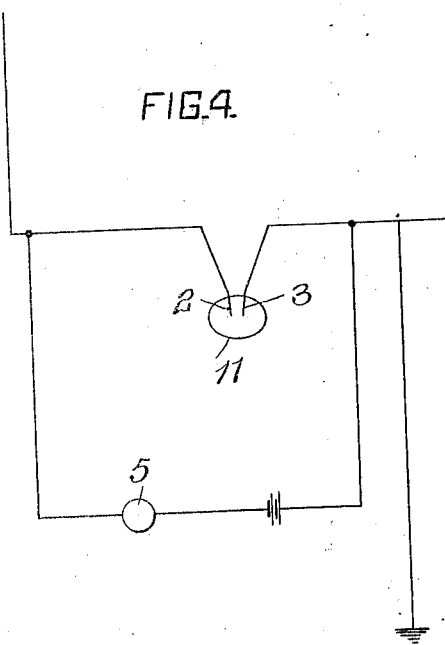

WITNESSES
Robert Bradley
Fred Kirchner

INVENTOR
Reginald A. Fessenden
by Dennis S. Wolcott ATT'Y

No. 727,331.

PATENTED MAY 5, 1903.

R. A. FESSENDEN.
RECEIVER FOR ELECTROMAGNETIC WAVES.
APPLICATION FILED APR. 9, 1903.

NO MODEL.

2 SHEETS—SHEET 2.

FIG. 5.

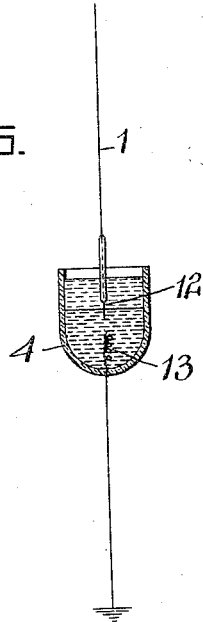


FIG. 6.

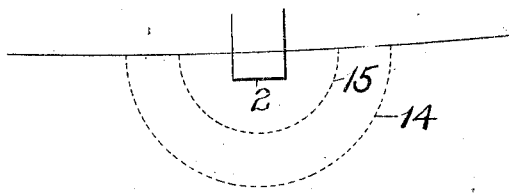


FIG. 7.


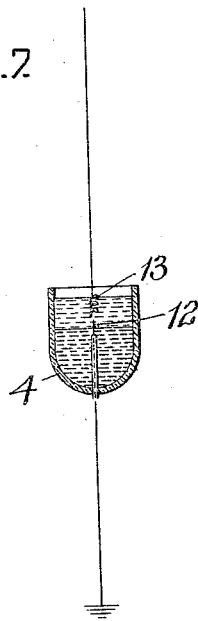


FIG. 8.

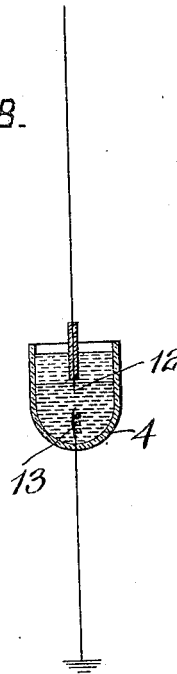

WITNESSES:

Herbert Bradley.
Fred Kirchner.

INVENTOR

Reginald A. Fessenden
by *Samuel S. Wolcott* Att'y

UNITED STATES PATENT OFFICE.

REGINALD A. FESSENDEN, OF PITTSBURG, PENNSYLVANIA.

RECEIVER FOR ELECTROMAGNETIC WAVES.

SPECIFICATION forming part of Letters Patent No. 727,331, dated May 5, 1903.

Application filed April 9, 1903. Serial No. 151,867. (No model.)

To all whom it may concern:

Be it known that I, REGINALD A. FESSENDEN, a citizen of the United States, residing at Pittsburg, in the county of Allegheny and State of Pennsylvania, have invented or discovered certain new and useful Improvements in Receivers for Electromagnetic Waves, of which improvements the following is a specification.

The invention described herein relates to certain improvements in current-actuated wave-responsive devices of the class or kind described and claimed in Letters Patent No. 706,744, granted to me August 12, 1902, and adapted to be so affected by currents generated by electromagnetic waves as to produce a change in or variation of the conductivity of the receiving-circuit, of which said device forms a part.

The invention is hereinafter more fully described and claimed.

In the accompanying drawings, forming a part of this specification, Figure 1 is a sectional view of a form of receiver embodying my improvement. Figs. 2, 3, 4, and 5 are similar views of modified forms of receiver, and Fig. 6 is a diagrammatic view illustrating the mode of operation of the receiver. Figs. 7 and 8 illustrate further modifications in the construction of the receiver.

It is characteristic of the hot-wire receiver described in the above patent referred to, and which has been termed a "barretter," that the energy of the electromagnetic waves is utilized to heat a body of small mass, and hence requires a small amount of energy to be heated to such an extent as to change its electrical conductivity. Heretofore metals, especially platinum and silver, have been used, as described in the patent referred to; but it has been found that substances other than metals are available for this purpose, more especially liquids, and of the latter class preferably electrolytes have given even better commercial results than metals, for the following reasons: first, for the reason that liquids are not by reason of their nature injured by excessive discharges; second, because the specific resistance of liquids is much higher, in some cases as much as a million times greater, than that of metals, and consequently to obtain the same resistance a

very much smaller mass, which is capable of being heated to a much larger extent, may be used; third, because the amount of change of resistance per degree of centigrade is very much greater—for example, the resistance of sulfuric acid when not quite concentrated changes approximately twelve per cent. per degree centigrade, while the change in platinum is only about one-third of one per cent. per degree centigrade. For all these reasons the results produced are very much greater and the action of the receiving device is much more reliable.

A liquid barretter or current-actuated wave-responsive device may be constructed in several ways. For instance, it is found that if the loop of a metal barretter such as described in the patent be broken while it is immersed in nitric acid it will nevertheless act even more efficiently than before, and hence a barretter may be formed consisting of two thin platinum wires 2 and 3, as shown in Fig. 1, having their ends immersed in a liquid contained in a suitable vessel 4 and forming, together with such liquid, a part of a receiving-circuit, including an indicating device 5. This barretter may be connected either directly or indirectly with a receiving-vertical 1. A second method is to moisten a minute fiber—for example, a cotton thread—and to use it as the loop of a barretter. A desirable construction for this form of barretter is shown in Fig. 2 and consists of a fiber loop 6, having one end immersed in a liquid, which will be caused to travel along the fiber by capillary action and maintain the fiber in a saturated condition. A third method consists in forming a minute hole through a diaphragm 7, conveniently done by drawing down a very thin capillary tube to about three one-thousandths (.003) of an inch internal diameter, cementing it into a hole in the center of a thick glass disk, and then grinding off the ends of the glass tube until they are flush with the surface of the diaphragm. The diaphragm is so arranged in a suitable vessel 4 as to form a partition between two portions of the solution in the cup or holder shown in Fig. 3, said portions being thus separated except by the thin column of the liquid contained in the capillary tube, said column forming the barretter. A ter-

minal 9, preferably of platinum, connected
 to the vertical, is immersed in one portion of
 the liquid, and a second terminal 10, prefer-
 ably of platinum also, is connected to ground
 5 and has one end immersed in the other por-
 tion of the liquid. These platinum wires,
 with the liquid, are to be connected either di-
 rectly in series with the vertical or in the
 secondary of a transformer, and the barret-
 10 ter thus formed is adapted to be used in the
 manner described in prior patents granted
 to me. A fourth method is to connect two
 platinum wires by a thin film or small body
 of conducting liquid, as indicated in Fig. 4.
 15 This can be done conveniently by inserting
 the wires into a bubble 11, formed of such
 liquid. A fifth method is to insert a small
 piece 12, of platinum or similar material,
 into a liquid, such as nitric acid, so that only
 20 its point is immersed. Fig. 5 shows such an
 arrangement, the platinum wire being cover-
 ed with silver. The silver wire has a diame-
 ter of about .003 of an inch, and the
 platinum core inclosed therein has a diame-
 25 ter of about .00004 of an inch. The silver is
 removed or eaten off from the lower extremity,
 and the platinum core projects into the solu-
 tion of nitric acid. This solution of nitric acid,
 which preferably contains nitrous acid, is
 30 covered by a layer of kerosene-oil, so as to
 prevent evaporation of the acid and to pre-
 vent the platinum from being fused. A sec-
 ond platinum wire 13 is also immersed in
 the liquid, preferably by inserting it through
 35 the bottom of the vessel 4, and these wires
 are connected to the vertical and to ground
 and also included in the indicating-circuit.
 It follows from the well-known electrical for-
 mula giving the resistance of a cylindrical
 40 body in a conducting medium that practi-
 cally all the resistance is concentrated with-
 in a short distance of the point where the
 platinum wire 12 projects into the acid. For
 example, if the platinum has a diameter of
 45 .00004 of an inch, and it is immersed in the
 acid to a depth of .00002 of an inch, practi-
 cally all the temperature effected will take
 place inside of a hemisphere of liquid whose
 50 radius is .00004 of an inch. Such a hemi-
 sphere is indicated in Fig. 6, where 2 repre-
 sents the tip of the platinum, and 14 repre-
 sents the hemisphere referred to. That this
 is true will be seen by considering a second
 hemispheric shell 14, having the thickness of
 55 .00004 of an inch outside of the hemisphere 15.
 The quantity of liquid in this shell 14 will be
 more than eight times that in the shell 15,
 and consequently it will take eight times the
 amount of heat to raise it to this same extent.
 60 At the same time the resistance of the shell
 14 will be roughly the same as that of 15.
 Hence it follows that the effect of the shell
 14 will be only one-eighth that of 15, and con-
 sequently that although the effect of the dif-
 65 ferent parts of the liquid within the bound-
 ary of 15 does not vary much and all parts
 are almost equally efficient, as soon as we

pass the boundary of 15 the effect of the vari-
 ations of liquid beyond the boundary begins
 to fall off very rapidly, and at a distance of 70
 two or three times the diameter of the wire
 it may be neglected. This may be deduced
 at once from the proposition that the elec-
 trical resistance between two copper disks 75
 laid on a plate of sheet-copper is conditioned
 almost entirely by the size of the disk, and by
 the conductivity of the copper sheet; while
 it is not affected except to an unappreciable
 extent by the distance between them. As
 shown in Fig. 7, the terminal 12 may be in- 80
 serted through the bottom of the vessel 4, in
 which case an indicating liquid, such as bi-
 sulfid of carbon, having a greater specific
 gravity than the nitric acid is used in con- 85
 nection with the latter. As indicated in
 Fig. 8, the wire 12 may be surrounded with
 glass, so as to prevent any gas given off from
 adhering to the wire, and thereby decreasing
 its effective area.

The arrangement of circuits used with the 90
 liquid barretter is practically the same as
 that with the metal barretter described in the
 patent referred to.

It is found that certain liquids act better
 than others—as, for example, though carbon- 95
 ate of soda, caustic soda, nitrate of potash,
 and other substances give good results, it is
 preferred to use nitric acid, for the reason
 that the effects are stronger with it than with
 most other liquids, and in the case of a burn- 100
 out it is sufficient to screw down the plat-
 inum wire until it is again immersed. The
 burn-out is not liable to occur, on account of
 the cooling effect of the liquid on the wire.
 When using silver-coated platinum wire, the 105
 screwing down of the wire into the nitric acid
 will subject the silver to the action of the
 acid, which will remove it from the platinum.
 If, however, a high voltage—*e. g.*, seven or
 eight—be used in the local circuit, carbonate 110
 of soda will give larger effect than nitric acid.

It is to be noted that in the case of the
 liquid barretter the action of the electromag-
 netic waves is to cause a greater current to
 pass in the local circuit, owing to the fact 115
 that the conductivity of electrolytes increases
 instead of decreases with heat. With a liq-
 uid barretter having a resistance of between
 six hundred and two thousand ohms the in-
 crease of conductivity when the liquid is 120
 heated is so marked as to permit of the opera-
 tion of a siphon recorder or relay, though a
 telephone may be used.

It is to be noted that there are several dis-
 tinct methods in which metal and liquid can 125
 be used in conjunction to form a receiver for
 electromagnetic waves. First, the case of a
 conductor, such as oxidized silver, in contact
 with a liquid like mercury, where the action
 is apparently a true coherer action caused by 130
 the voltage produced by the electromagnetic
 waves breaking down the insulating-oxid and
 making a good electrical contact between the
 silver and mercury. This effect does not oc-

cur and is not utilized in my form of liquid barretter, for, in the first place, the resistance of the apparatus, if constant and definite, does not alter by shock or jar, returns to the same value no matter what the strength of the wave, and an entirely new piece of wire immersed to the same depth when a burn-out has occurred allows the same current to pass as any other similar piece of wire. Again, the increase of conductivity is always the same in amount under the same conditions and is exactly what calculations show should be produced by the heating of the liquid. Secondly, the change of resistance is exactly proportional to the energy of the electromagnetic waves, thus differing from the operation of the coherer. Third, if the size of the platinum wire be increased, the effect falls off very rapidly, as it should do according to theory, while in the case of coherer this is not true.

A second method of using liquid and metal is illustrated in Fig. 3 of Letters Patent No. 706,738, dated August 12, 1902, for rectifying the alternating currents produced by the electromagnetic waves. This effect does not occur when using my improved form of receiver, as may be readily shown by substituting such receiver for the electrolytic cell shown in the patent, in which case no such rectification will be found to occur. The evident reason for this is the fact that the resistance of the liquid barretter is so arranged as to absorb the energy and not to allow any of it to pass through. The energy by being absorbed none of it can be rectified. A second reason is that the polarization capacity of the barretter is too small to permit of such rectification. A third proof of this consists in the fact that the signals are obtained almost as well when both terminals consist of similar pieces of platinum, in which case, according to theory, there should be no rectification.

A third method consists in utilizing the depolarization of the electrode caused by the heating of the liquid. While there is no doubt that such an effect is probably produced, it is masked, and when in actual working practically the entire effect seems to be due to the change in resistance. An effect which appears when the voltage of the local circuit is raised to such a point as to cause the gases to bubble off from the point gives rise to a fourth method. When this is the case, the waves effect an increase in resistance instead of diminution, possibly by first causing the bubble of gas to be deposited, which decreases the area of contact between the liquid and the platinum wire. This action is, however, irregular and occurs only

at a certain critical point, and as it does not always occur and regularly it is not available for actuating an indicating mechanism.

While the liquid receiver will work well no matter which pole is connected to the platinum, it is found in practice that better results are obtained when the platinum point is made negative, probably because bubbles of gas which may come off are dissolved in the liquid and tend to maintain the conductivity.

I claim herein as my invention—

1. A receiver for electromagnetic waves having a small heat capacity and consisting of a small quantity of liquid, substantially as set forth.

2. A receiver for electromagnetic waves consisting of a small quantity of liquid, the conductivity of which is affected by the action of electromagnetic waves, substantially as set forth.

3. A receiver for electromagnetic waves consisting of a small quantity of liquid adapted to have its resistance decreased by the action of electromagnetic waves, substantially as set forth.

4. A receiver for electromagnetic waves consisting of a material increasable in conductivity by currents produced by electromagnetic waves, substantially as set forth.

5. A receiver for electromagnetic waves consisting of a liquid and rapidly responsive as regards temperature to effects produced by electromagnetic waves, substantially as set forth.

6. A receiver for electromagnetic waves consisting of a small quantity of nitric acid, substantially as set forth.

7. A receiver for electromagnetic waves, having in combination a small quantity of nitric acid, and terminals formed of platinum immersed in said liquid, substantially as set forth.

8. A receiver for electromagnetic waves having all its contacts perfect contacts and formed of a material increasable in conductivity by currents produced by electromagnetic waves, substantially as set forth.

9. A receiver for electromagnetic waves, having in combination a small quantity of nitric acid, and terminals formed of platinum immersed in said liquid, the positive terminal having an external covering, substantially as set forth.

In testimony whereof I have hereunto set my hand.

REGINALD A. FESSENDEN.

Witnesses:

JESSIE E. BENT,
T. L. SCLATER.